

ECOFILTRO PLUS



ILH BERLIN
INSTITUT FÜR LUFTHYGIENE

ACCREDIA
UNITE ITALIANO DI ACCREDITAMENTO



MODULO DI FILTRAZIONE REMOTATO AD ALTISSIMA EFFICIENZA PER VMC

Caratteristiche: filtro elettronico per unità di recupero calore domestico. Composto da griglia di polarizzazione e piastre captatrici complete di telaio di supporto. Sistema elettronico di generazione e controllo. Plenum di contenimento e raccordo in materiale plastico. Sicurezza assoluta con sgancio in fase di manutenzione. Spazio per inserimento prefiltro opzionale.


HIGH EFFICIENCY FILTRATION MODULE FOR VMC SYSTEMS

Characteristics: electronic filter for domestic heat recovery unit. Consisting of polarizing grille and collection plates complete support frame. Electronic system for generation and control. Containment and fitting plenum of plastic material. Absolute safety with release during maintenance. Space for prefilter installation optional.

DESCRIZIONE PARAMETRI PARAMETER DESCRIPTION	UNITÀ DI MISURA UNIT OF MEASURE	VALORI VALUES
Tensione Rated voltage	V	230
Frequenza Frequency	Hz	50
Potenza nominale Installed power	W	9
Portata aria massima Maximum air flow rate	m ³ /h	420
Massima perdita di carico Maximum air pressure drop	Pa	34
Efficienza UNI 11254 ePM2,5 Efficiency UNI 11254 ePM2,5	%	90/95
Efficienza filtrazione batterica Bacterial filtration efficiency	%	> 90



DISEGNI | DRAWINGS

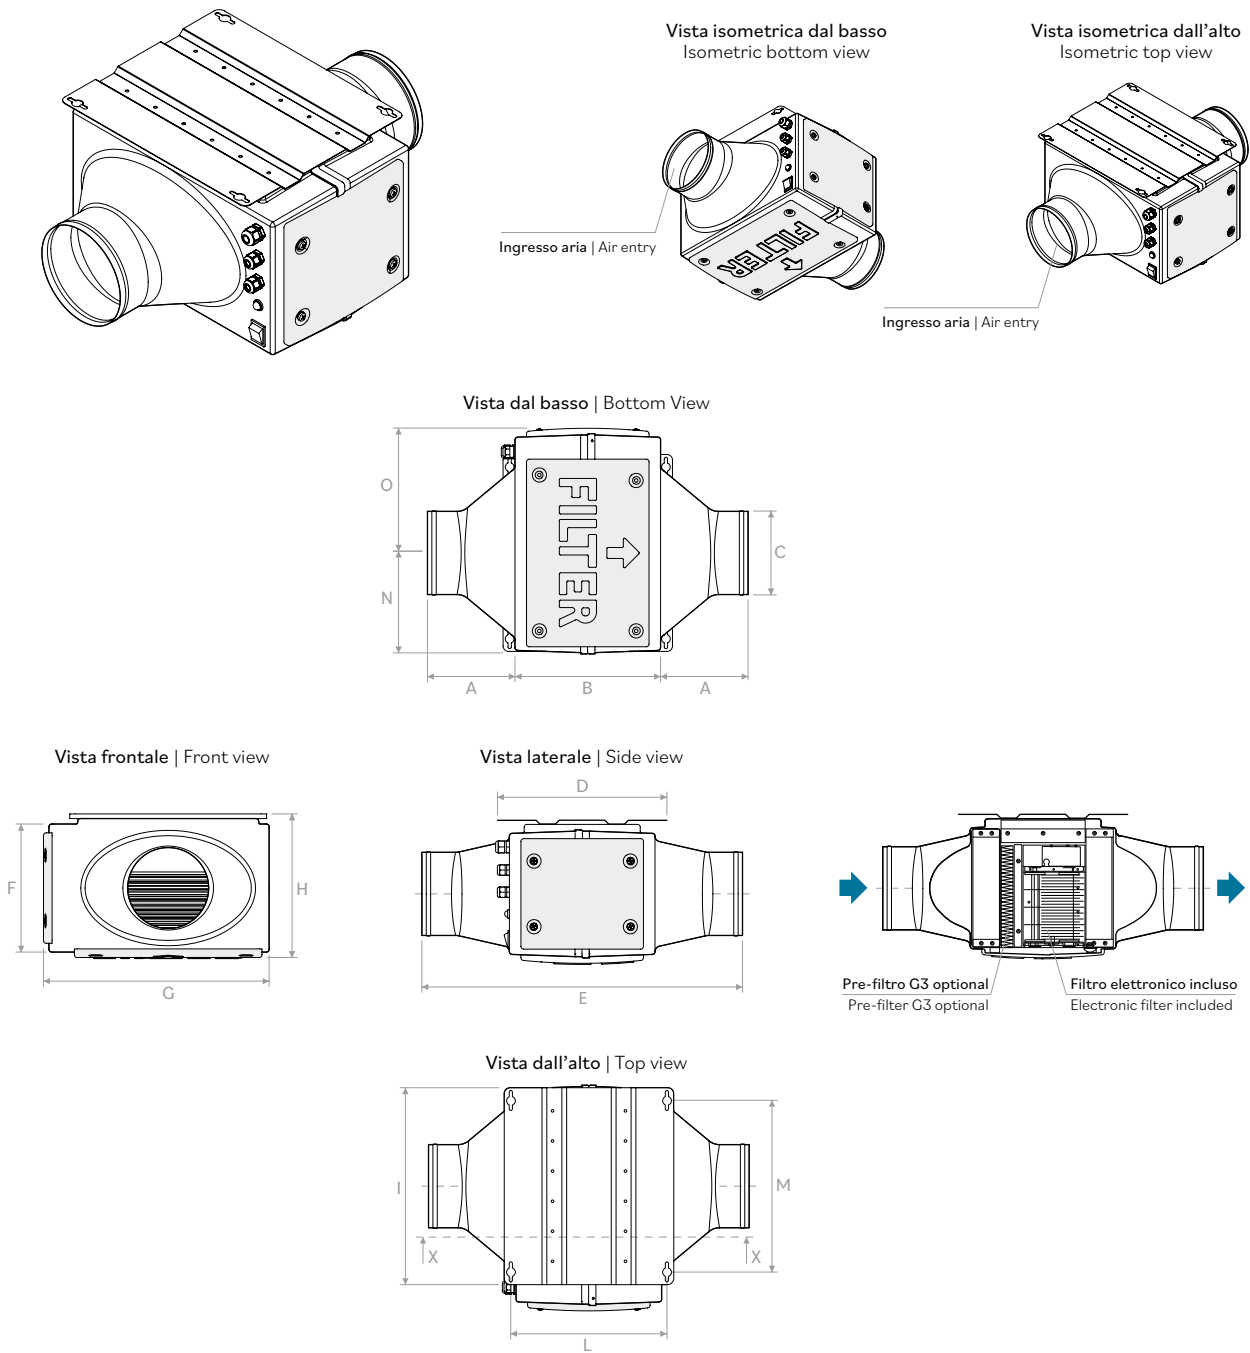

	A	B	C	D	E	F	G	H	I	L	M	N	O
mm	160	266	Ø 156	310	586	234	412	262	360	286	314	185	228

PREZZI | PRICES

Modello Model	€
ECOFILTROPLUS	-
PF ECOFILTROPLUS*	-

* Prefiltro efficienza G3 | Prefilter G3 efficiency.

