

ECOFILTRO PLUS



ILH BERLIN
INSTITUT FÜR LUFTHYGIENE

ACCREDITA
UNITE ITALIANO DI ACCREDITAMENTO



MÓDULO REMOTO DE FILTRACIÓN DE MUY ALTA EFICIENCIA PARA VMC

Características: filtro electrónico para la unidad de recuperación del calor doméstico. Compuesto por rejilla de polarización y placas captadoras con marco de soporte. Sistema electrónico de generación y control. Placa de contención y conexión de material plástico. Seguridad total con desenganche durante el mantenimiento. Espacio para la introducción del prefiltro opcional.


HIGH EFFICIENCY FILTRATION MODULE FOR VMC SYSTEMS

Characteristics: electronic filter for domestic heat recovery unit. Consisting of polarizing grille and collection plates complete support frame. Electronic system for generation and control. Containment and fitting plenum of plastic material. Absolute safety with release during maintenance. Space for prefilter installation optional.

DESCRIPCIÓN DE LOS PARÁMETROS PARAMETER DESCRIPTION	UNIDAD DE MEDIDA UNIT OF MEASURE	VALORES VALUES
Tensión Rated voltage	V	230
Frecuencia Frequency	Hz	50
Potencia nominal Installed power	W	9
Caudal máximo de aire Maximum air flow rate	m ³ /h	420
Máxima pérdida de carga Maximum air pressure drop	Pa	34
Eficiencia UNI 11254 ePM2,5 Efficiency UNI 11254 ePM2,5	%	90/95
Eficacia de filtración bacteriana Bacterial filtration efficiency	%	> 90



DISEÑOS | DRAWINGS

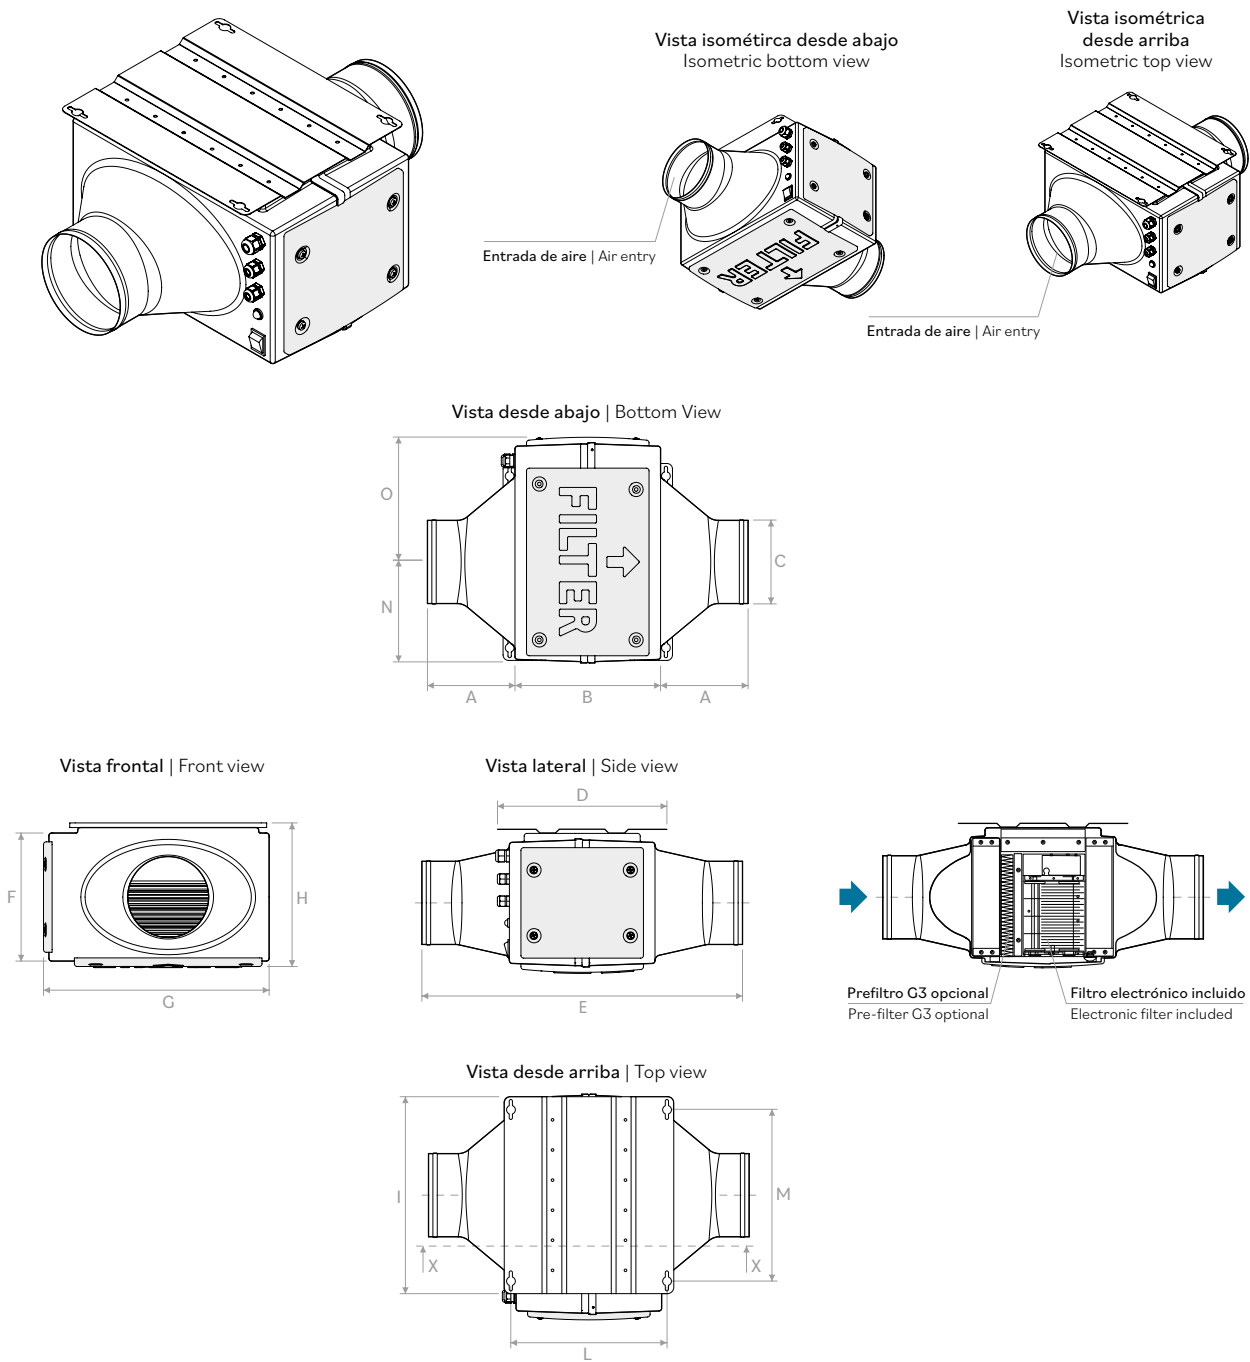

SANITIZATION

	A	B	C	D	E	F	G	H	I	L	M	N	O
mm	160	266	Ø 156	310	586	234	412	262	360	286	314	185	228

CÓDIGOS | CODES

Modelo | Model
ECOFILTROPLUS
PF ECOFILTROPLUS*

* refiltro de eficiencia G3 | Prefilter G3 efficiency.

