




DLFLA



Scheda tecnica
Data sheet

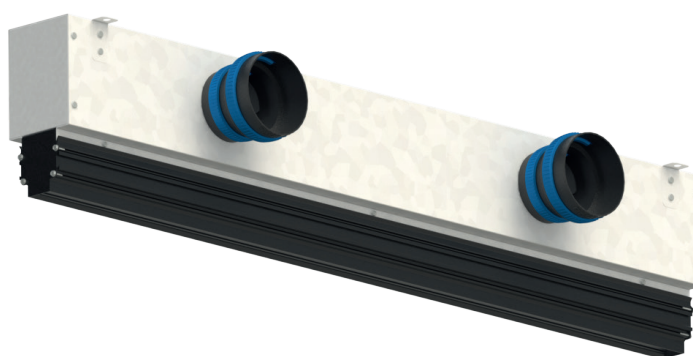

Listino
Price list

Caratteristiche: diffusori lineari a singola feritoia finitura standard nero RAL 9005 opaco con deflettore, senza cornice per installazione a scomparsa a parete o soffitto.

DLFLADW Diffusore verniciato bianco RAL 9016 opaco.

Costruzione: alluminio verniciato nero RAL 9005 opaco.

Impiego: a soffitto o parete per mandata e ripresa. Possibilità lancio verticale e lancio laterale con effetto Coanda.

Fissaggio: staffaggio a parete o solaio mediante staffe poste sul plenum. Sedi di appoggio della parete o solaio in cartongesso ricavate sul diffusore stesso.

Accessori:

- Serranda a scorrimento.
- Deflettori.
- Plenum in acciaio zincato con attacco circolare PLUGN.

Characteristics: linear single slot diffusers standard version matt black RAL 9005 with deflector, without frame for hidden installation, on wall or ceiling.

DLFLADW diffuser finish white RAL 9016 matt.

Finishing: extruded aluminum painted black RAL 9005 matt.

Utilization: ceiling or wall installation for air supply and return. Possibility of vertical throw and lateral throw with Coanda effect.

Fixing: bracketing on the wall or floor using brackets placed on the plenum. Support seats of the wall or floor in plasterboard made on the same diffuser.

Accessories:


- Sliding damper.
- Deflectors.
- Plenum box in galvanized steel with circular connection PLUGN.

MODELLI | MODELS


DLFLA20	Diffusore con alette deflettrici (1) + (2) Diffuser with deflectors (1) + (2)
DLFLA40	Diffusore con alette deflettrici e serranda a scorrimento (1) + (2) + (3) Diffuser with deflectors and sliding control damper (1) + (2) + (3)
PDLFLAVMC	Plenum non isolato Not insulated plenum box




DISEGNI | DRAWINGS

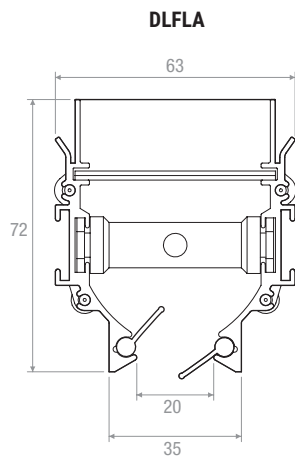


VERSIONI | VERSIONS

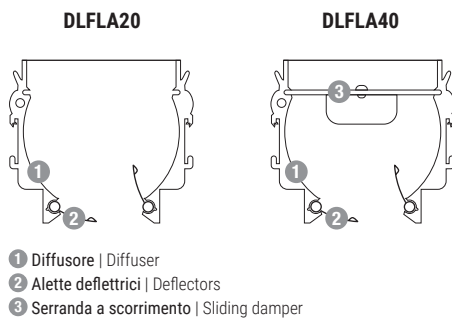


LANCIO | THROW

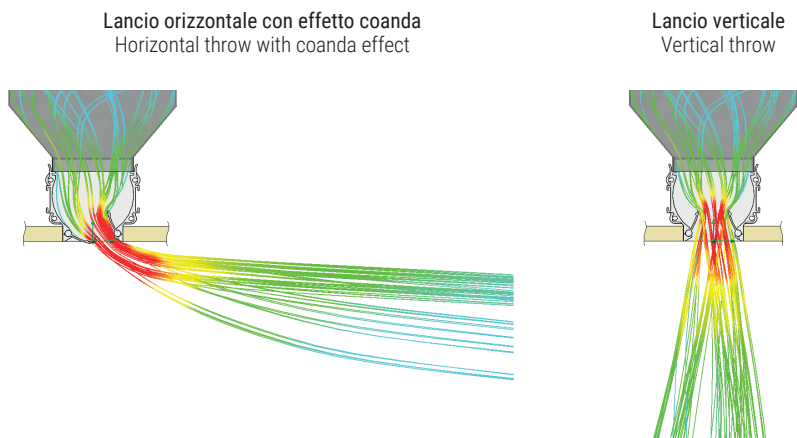

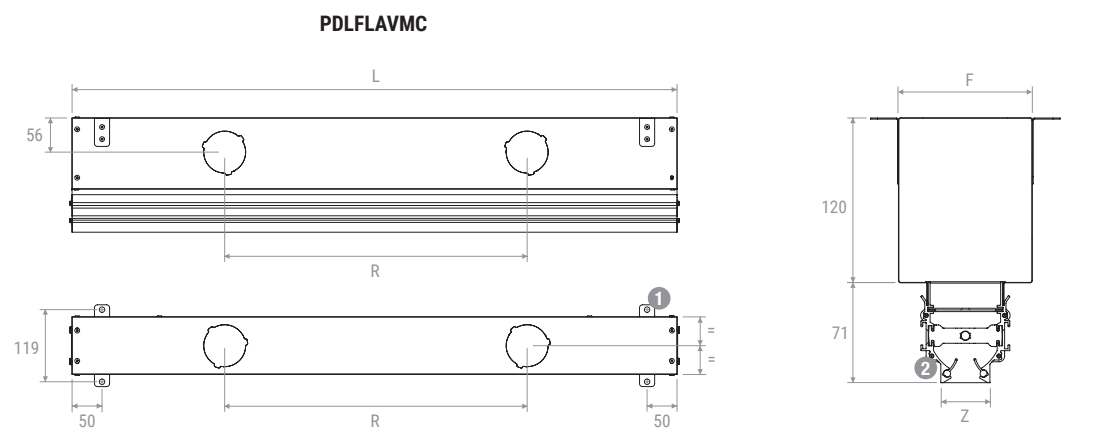

- 1 Fori per staffaggio plenum al supporto | Plenum box mounting holes to fix to support
2 Profilo di fissaggio al controsoffitto | Couter ceiling fixing profile

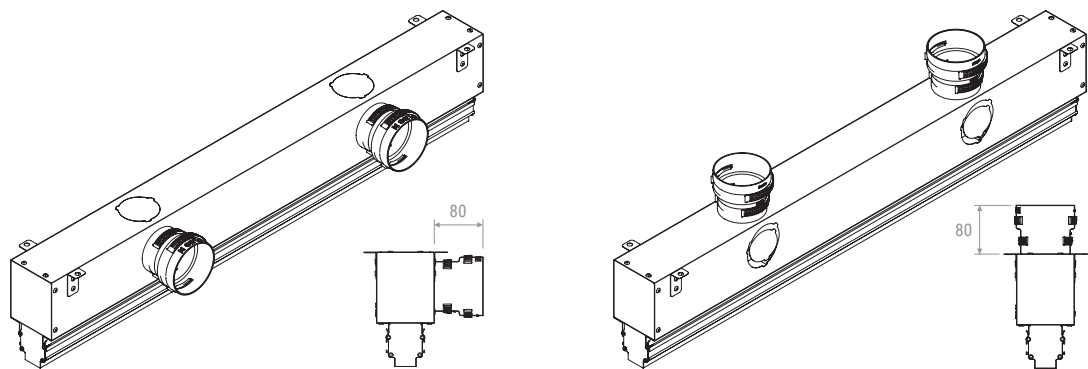

Possibilità installazione collarino laterale o superiore | Possibility installation spigot side or top

MISURE | MEASURES

Modello Model	L	Z	Stacchi (predisposizione) Spigots (predisposition)	Passo Pitch R	Stacchi Spigots	Supporti Brackets	F
	mm	mm	N°	mm	Ø	N°	mm
PDLFLAVMC500	500 + 10	35	2 + 2	250	VMC PLUG	4	94
PDLFLAVMC1000	1000 + 10		2 + 2	500			



TABELLA DI SELEZIONE | TECHNICAL DATA

Modello Model	A_v [m²]	Q [m³/h]		L_{WA} [dB(A)]		$X_{(0,25)}$ [m]		Dp_t^* [Pa]	
		min	max	min	max	min	max	min	max
DLFLA500	0,0049	20	50	26	35	0,5	1,9	10	30
DLFLA1000	0,0098	40	100	26	35	0,5	1,9	10	30

* Senza equalizzatore e serranda completamente aperta | Without equalizer and calibration damper completely open.

PREZZI | PRICES

			
Modello Model	DLFLA20	DLFLA40	PDLFLAVMC
	€	€	€
DLFLA 500			
DLFLA 1000			

			
Modello Model	DLFLADW20	DLFLADW40	PDLFLAVMC
	€	€	€
DLFLADW 500			
DLFLADW 1000			

ACCESSORIES - DOMESTIC

